


MCM

ENGINEERING, INC.

400 Hz TRANSMISSION WIRE

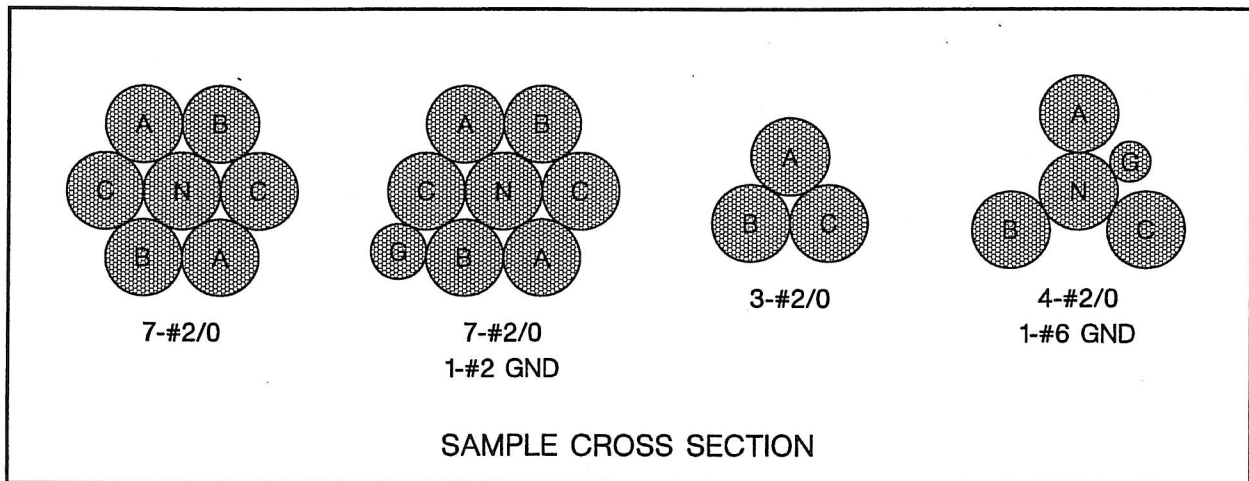

- Planetary Wrap Construction
- NEC Article 310 Standard
- Minimized Voltage Drop
- Color Coded
- Rated at 600 VAC
- 400 Hz Rated
- Voltages to 5 kV
- UL Standard 44
- Special Designs
- VW-1 Flame Retardant

MCM specializes in 400 Hz system and product design. An integral part of a 400 Hz central system is the distribution of the power from the generating source to each point of use. MCM has wire triplexed to our specifications to reduce the high reactive voltage loss characteristic in 400 Hz power transmission. The wires for conduit installation are typically configured with 3 or 7 conductors. We offer a wide range of voltages, conductor size and insulation types. Color coding or special markings are also available. In addition to triplexed wires, we can provide direct burial type cable and single jacketed, multi-conductor cable.

DS040