


PCA FLOVENT LAYFLAT DUCT

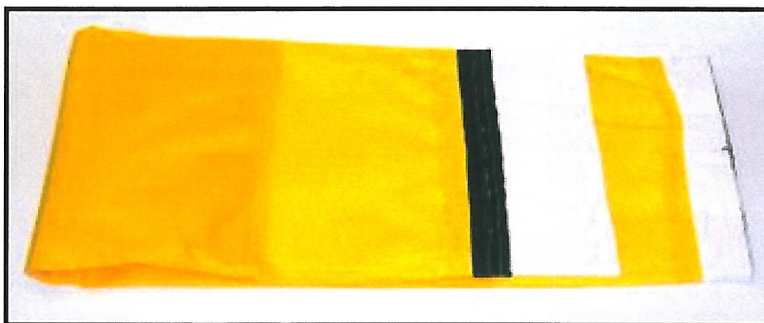

Layflat PVC/Polyester Reinforced Tubing

FloVent™ is a molecularly bonded; heat-sealed collapsible blower tubing designed for demanding positive-pressure applications. The tubing is collapsible, flexible and extremely resistant to external abrasion, deterioration and fatigue. It has excellent UV Stabilization for outdoor use, mold and mildew inhibitors and the fabric meets California Fire Marshall Code Approvals and UL94VTM-O Standards. Available Color: Yellow. This Design utilizes a Heat-Sealed (Welded) Construction with a one piece extended inner liner and elastic seals at connection joints to minimize air loss.

Specifications:

| | |
|---------------------------|--|
| Color: | Yellow |
| Length: | 10, 20, 25 and 50 feet (3.0, 6.0, 7.6, and 15.0 meters) (Custom lengths available upon request.) |
| Diameters: | 8", 12" & 14" ±¼" |
| Temperature Range: | - 20° F. to 200° F. (- 29° C. to 88° C.) |
| End Finish: | Standard – plain. |

DS071 0211